

INVISIO V60

Multi-Com Control Unit

USER MANUAL

Contents

Disclaimer	4
Overview	6
Getting Started	7
Hear-Thru Control	8
Hear-Thru Volume Steps	9
Transmit	10
PTT Assignment Examples	11
Received Audio	12
Received Audio Swap	13
Received Audio in Both Ears	14
Mute All Radios	15
Monitor Single Radio	16
Alternative State	17
Power Management	18

Incompatible Cables	19
Troubleshooting	20
System Reset	21
Attachment to Equipment	22
Fitting To Molle Webbing	23
Cable Management	24
Storage and Maintenance	25
Audio Tones	26
Glossary of Terms	27

Disclaimer

The information in this INVISIO User Manual (the “User Manual”) is subject to change without notice and INVISIO is under no obligation to provide the user with updates, amendments or modifications.

This User Manual describes the use of the INVISIO System (the “Product”) which includes headset, control unit, cables and accessories.

EXCEPT WHERE PROHIBITED BY LAW, THE WARRANTY EXPRESSLY GRANTED AS A PART OF INVISIO’S GENERAL TERMS AND CONDITIONS FOR DELIVERY, AS TO PERFORMANCE, RESULT, OR OTHERWISE IS THE USER’S EXCLUSIVE WARRANTY REMEDY.

INVISIO EXPRESSLY DISCLAIMS, AND USER EXPRESSLY WAIVES, ALL OTHER WARRANTIES, DUTIES, AND OBLIGATIONS IMPLIED IN LAW, INCLUDING THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OTHER WARRANTY OF QUALITY, OR THOSE ARISING FROM A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE, EXCEPT OF TITLE AND AGAINST PATENT INFRINGEMENT. THE REMEDIES SET FORTH HEREIN ARE EXCLUSIVE.

By assembling and/or using the Product, the user agrees that he or she has read and understood the entire User Manual, including, without limitation, all instructions and warnings contained herein, prior to using the Product. The user also agrees that he or she will ensure that any additional or subsequent user of the Product will read, understand, and comply with the User Manual, including, without limitation, all instructions and warnings contained therein, prior to allowing that person to use the Product.

The Product is designed exclusively for use by trained, professional personnel (“Authorized Personnel”) performing their duties in their official capacity. Under no circumstances should the Product be used in any manner other than that described in this User Manual.

Opening or otherwise tampering with one or more of the control units, headsets, or accessories voids any warranty. Only original, manufacturer-approved accessories and batteries may be used with the Product.

The user must activate, adjust, clean, and maintain the Product in accordance with this User Manual. Failure to activate, adjust, clean, and maintain the Product in accordance with this User Manual voids any warranty. In consideration of receiving the Product, the user hereby agrees to the fullest extent permitted by law, as follows:


THE USER WAIVES ANY AND ALL CLAIMS AGAINST INVISIO AND ALL RELATED PARTIES RESULTING FROM USE OF THE USER MANUAL, THE PRODUCT, AND/OR ANY OF ITS COMPONENTS. IN NO EVENT WILL INVISIO OR ITS RELATED PARTIES BE LIABLE FOR DIRECT, INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE USER MANUAL OR THE PRODUCT.

The user releases INVISIO and all related parties from any and all liability for any loss, damage, injury, or expense that the user may suffer, as a result of the use of the User Manual or Product, due to any cause whatsoever, including, without limitation: strict liability, misrepresentation, negligence, gross negligence, or breach of contract on the part of INVISIO and all related parties in the design or manufacture of the Product and any of its components.

In the event of the user’s death or incapacity, all provisions contained herein shall be effective and binding upon the user’s heirs, next of kin, executors, administrators, beneficiaries, assigns and representatives (the “User’s Representative”).

In any event, INVISIO’s liability to any user or User’s Representative for any reason and upon any cause of action or any claim in contract, tort, or otherwise with respect to the User Manual or the Product shall be limited to the price paid to INVISIO for the unit that caused any alleged damage.

No cause of action which accrued more than one (1) year prior to the filing of a suit alleging such cause of action may be asserted against INVISIO or any party which designed or manufactured any component of the Product. All parties waive to the fullest extent permitted by law any right to a trial by jury as to any claims relating or referring in any way to the Product including, without limitation, any claims based in strict liability, negligence, gross negligence, breach of warranty, and any other claim based in law or equity.

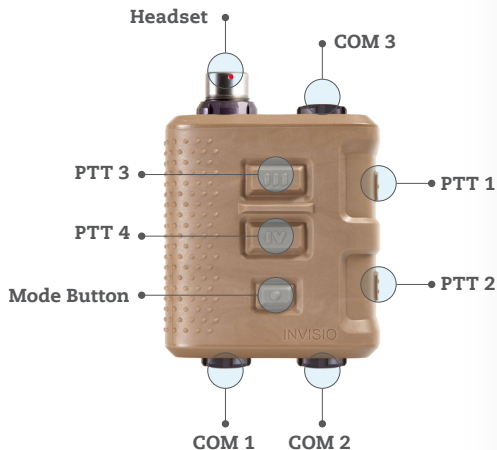

INVISIO V60

Communication and Hearing Protection system enabling hearing protection with ambient hear-thru and the ability to control three communication devices simultaneously. Hear-thru volume can be adjusted. The system is designed to meet or exceed military specifications.

Getting Started

1. Connect headset & radio(s)
2. Turn on radio(s) - hear-thru starts automatically
3. Key PTT to transmit on radio

Start-up takes less than 2 seconds and there is an audio tone. When using an INVISIO headset with hear-thru capabilities, hear-thru starts automatically. To turn the hear-thru off, see section on hear-thru control.

Turn Off

To turn off the V60 disconnect the radio cable(s) or turn the radio off.

Caution

- Avoid acoustic feedback by turning the V60 off during headset fitting.
- High sound pressure levels may damage hearing. Ensure radio volume is low at start-up.

Hear-Thru Control



Hear-Thru Adjustment

Hear-thru volume is adjusted by a short press of the Mode Button.
Audio Tone: 1 Beep



Hear-Thru Off

Hear-thru is turned off by a long press of the Mode Button (~1second).
Audio Tone: 2 Beeps



Hear-Thru On

Hear-thru is turned back on by pressing the Mode Button.
Audio Tone: 1 Beep

Long Press

- Turns hear-thru off

Short Press

- Turns hear-thru on or change hear-thru volume steps.

Caution

Avoid acoustic feedback by turning the V60 off during headset fitting.

Hear-Thru Volume Steps



Enhanced Hearing

Enhanced Hearing has a gain of +10 dB.



Natural Hearing

Natural Hearing has a gain of 0 dB.



Comfort Hearing

Comfort Hearing has a gain of -10 dB.

Caution

- Turn the Hear-Thru Off or use Comfort Hearing when in noisy vehicles to reduce noise exposure.
- Using Enhanced Hearing for extended periods may increase noise exposure.

Transmit

Transmit Modes

The V60 has different ways of transmitting depending on the device and cables used. Examples include:

- **Push-To-Talk (PTT)** (e.g. 2-Way Radio)
- **Latching (Mute)** (e.g. Intercom System)
- **Open Mic** (e.g. Intercom System)
- **Call Answering** (e.g. Mobile Phone)
- **Listen Only** (e.g. Minesweeper)

Please consult your representative for more information on your system setup.

PTT Assignment

PTT buttons are dynamically assigned, with a rule of thumb being PTT1 to COM1 and PTT2 to COM2. Keying two PTT's simultaneously is possible. When multi-net radios are connected the following rules apply:

- Every connected device is allocated at least one PTT button.
- Priority is COM1 through to COM3 for button allocation when multi-net radios are connected.

Note

Different configurations of V60 cables can result in unassigned PTT buttons and different functionality.

PTT Assignment Examples

Example 1

COM Port	PTT Assignment
COM1: Single Net Radio	PTT1: COM1
COM2: Single Net Radio	PTT2: COM2
COM3: Single Net Radio	PTT3: COM3

Example 2

COM Port	PTT Assignment
COM1: Dual Net Radio	PTT1: COM1/Net1 PTT2: COM1/Net2
COM2: Single Net Radio	PTT3: COM2
COM3: Single Net Radio	PTT4: COM3

Note

Certain cable and devices when connected will not utilise a PTT button, for example a listen only cable.

Received Audio

How Audio is Received

COM	Default
COM1 / Net1	Left
COM1 / Net2	Right
COM2	Right
COM3	Left

PTT Audio Tones

Tones are generated to indicate press and release of PTT buttons.



Audio Tone

PTT Keyed: 1 Beep
PTT Released: 2 Beeps

Note

COM1 supports dual net left and right audio. If a dual net left and right audio cable is connected to COM2 or COM3, only one net is audible. While transmitting, depending on the headset, audio can be heard in one or both ears. Refer to headset manual.

Received Audio Swap



Swap Default Audio Left-Right

Default audio routing can be swapped so that COM1 is in right ear and COM2 is in left ear via a key combination.



Key Combo

1. Press and Hold: Mode Button
2. Press and Hold: PTT1
3. Press and Hold: PTT2
4. Release after 5 Seconds: All Buttons



Audio Tone

Swap Audio: 1 Beep
Default Audio: 2 Beeps

COM	Swapped
COM1 / Net1	Right
COM1 / Net2	Left
COM2	Left
COM3	Right

Note

While transmitting in Default or Swapped audio mode, all received audio can be heard in one or both ears. Refer to headset manual.

Received Audio in Both Ears



Received Audio in Both Ears

Received Audio can be swapped between split and dual ear via a key combination.



Key Combo

1. Press and Hold: Mode Button
2. Short Press: PTT2
3. Release: Mode Button



Audio Tone

Both Ears On: 1 Beep
Both Ears Off: 2 Beeps

Received Audio in Both Ears

Received Audio in Both Ears Mode is primarily intended for use in high noise environments, whilst the default split ear audio is primarily intended for use in low noise environments.

INVISIO IntelliCable™

Received audio in both ears mode only works when INVISIO IntelliCable™ settings are programmed to default audio routing.

Note

While transmitting in Default or Swapped audio mode, all received audio can be heard in one or both ears. Refer to headset manual.

Mute All Radios



Mute All Radios

All radios can be muted (-20 dB) via a key combination.



Key Combo

1. Press and Hold: Mode Button
2. Short Press: PTT1
3. Release: Mode Button



Audio Tone

Mute: 1 Beep
Unmute: 2 Beeps

Exit Mute All Radios

To exit the Mute All Radios Mode, perform any of the following actions:

- Key Combo
- Press any assigned PTT button
- Connect or disconnect any cable.

Note

Some cables do not support Mute All Radios Mode.

Monitor Single Radio



Monitor Single Radio

A maximum of one focus can be selected at any given time (mutes other received radio audio by 20 dB) via a key combination.



Key Combo

1. Press and Hold: Mode Button
2. Press and Hold: PTT button
3. Release after 1 Second: All Buttons



Audio Tone

Focus: 1 Beep
De focus: 2 Beeps
Error: 3 Beeps

PTT Button to Use

- COM1: PTT1
- COM2: PTT2
- COM3: PTT3

Exit Monitor Single Radio Mode

To exit the Monitor Single Radio Mode, perform any of the following actions:

- Key Combo
- Press any PTT button assigned to a muted radio
- Connect or disconnect any cable

Note

An error tone is heard when no cable is connected to the COM port being set to Monitor Single Radio Mode.

Alternative State



Alternative State

An alternative duplex state is available on certain cables via a key combination.



Key Combo

1. Press and Hold: Mode Button
2. Short Press: PTT → PTT → PTT → PTT
3. Release: Mode Button



Audio Tone

Alternative State On: 1 Beep
Alternative State Off: 2 Beeps
Incompatible Cable: 3 Beeps

PTT Button to Use

- COM1: PTT1
- COM2: PTT2
- COM3: PTT3

Alternative State

Most radio cables run in Open Mic Mode as the alternative state.

Note

In Open Mic Mode, all receive audio is in the left ear only, as the V60 is always transmitting.

Power Management



Power Source

The V60 can be powered from either a battery pack (PS30) or a Radio.



Getting Started

The V60 automatically starts when connected to a power source.

Incompatible Cables



Warning Tones

A warning tone is heard when an incompatible cable is connected. The audio tone stops when the cable is disconnected.



Audio Tone

COM1 Error: 1 Beep (Repeated Continuously)
COM2 Error: 2 Beeps (Repeated Continuously)
COM3 Error: 3 Beeps (Repeated Continuously)
Headset Error: 4 Beeps (Repeated Continuously)

Causes

- Incorrect INVISIO IntelliCable™ settings
- Faulty cable or connector

Note

If multiple cable failures are detected the priority is: Headset, COM1, COM2, COM3.

System does not power on

- Check headset is connected
- Check radio is connected and powered on

Bad Audio Transmission

- Please see headset's user manual for proper usage of headset. Make sure, if using INVISIO X5 bone conduction microphone is correctly fitted
- Check cable is connected correctly

No Hear-thru

- Press Mode Button
- Press PTT button to check power is on

Note

Contact your representative if the issue is not resolved.



System Reset

System Reset overrides all key combinations and restores the V60 to its original state.



Key Combo

1. Press and Hold: Mode Button
2. Short Press: PTT1 → PTT2 → PTT1 → PTT2
3. Release: Mode Button



Audio Tone

System Reset: 5 Beeps

Note

System reset does not change the V60 firmware version.

Attachment to Equipment



Different Clip

The V60 is supplied with a Molle clip as standard, but different clips are available upon request.



2 mm Hex Key

Use a 2 mm Hex Key to change the clip.

Note

The clip can also be rotated when mounting to allow the V60 to be attached in different directions.

Fitting To Molle Webbing



Place Through Webbing

The Molle clip is threaded through two Molle straps, with the hook grasping the lower Molle strap.



Do Not Stress Connections

Cables should be positioned without hard bends at the connectors.

Caution

Ensure the control unit is securely fastened to your equipment, to avoid personal injury in the case of physical impact.

Cable Management



Fitting Cables to Equipment

Do not thread cables through equipment, such that they are subject to abrasion.



Removing Connectors

Do not attempt to disconnect cables from the V60 by pulling the cable. Remove by pulling on the connector.

Caution

- Ensure cables are securely fastened to avoid entanglement.
- Care should be taken not over-stress cables mounted in equipment.

Storage and Maintenance



Protect from Force

To avoid damaging the V60, store in a protected area without excess weight.



Dry and Ventilated

Store the V60 in a dry and ventilated area with caps removed to avoid moisture build-up in connectors.



Clean in Fresh Water

If the V60 becomes dirty or exposed to salt water, rinse in fresh water.

General Rule for Audio Tones

The general rule for the V60 audio tones is based on an on/off rule:

- On: 1 Beep
- Off: 2 Beeps
- Error: 3 Beeps

Hear-thru control

- Hear-thru on (1 Beep) - Hear-thru off (2 Beeps)
- Volume up/down (1 Beep)

Radio control

- PTT press (1 Beep) - PTT release (2 Beeps)
- Connect radio (No Tone) - Disconnect radio (No Tone)
- Latching on (1 Beep) - Latching off (2 Beeps)

System

- Power on (1 Beep)
- Power Off (No Tone)
- Open Mic Mode: On (1 Beep) - Off (2 Beeps)

Note

When using a battery pack (PS30), please refer to its user manual for tones.

BCM

INVISIO Bone Conduction Microphone.

Patented in-ear communication microphone for transmitting.

Hear-Thru

Microphone situated on the headset to monitor audio situational awareness of ambient surroundings.

PTT

Push-to-talk is used when transmitting during a 2-way radio communication. Pressing the PTT button enables transmission. Releasing enables monitoring.

PTT Mode

PTT Mode allows communication in both directions, but not simultaneously. When receiving the user must wait for the signal to end, before begin transmitting.

Open Mic Mode

Open-Mic Mode allows communication in both directions simultaneously. This allows all users to monitor and transmit at the same time.

Latching

Latching is turning and keeping the microphone on.

INVISIO IntelliCable™

Intelligent cable system enabling recognition of attached device.

© 2017 INVISIO Communications A/S.
INVISIO is a registered trademark of
INVISIO Communications A/S.

www.invisio.com

INVISIO[®]